




INTERNATIONAL WATER TREATMENT SPECIALISTS

Tandex WSD Water Soluble Degreaser

TANDEX WSD (Water Soluble Degreaser) - heavy duty cleaning without the use of a solvent. TANDEX WSD cleans everything from fingermarks on walls to the dirtiest mechanical workshop floors, simply by varying the concentration.

FEATURES

- Safe on skin
- Non caustic
- Contains no solvents
- Economical - diluted with water for use
- Versatile - effective on mineral, vegetable and hydraulic oils
- Safe on bitumen and painted surfaces.
- Biodegradable
- Non flammable

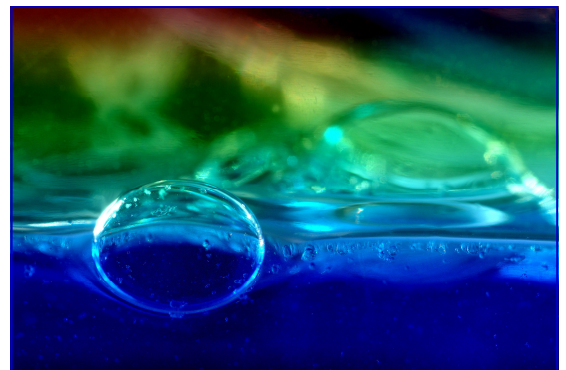

FLOOR DEGREASING

TANDEX WSD diluted 1 part product to 20 parts water provides an excellent floor cleaner for workshops, service bays, boiler rooms and any areas subject to heavy oil contamination. Simply mop or broom across the floor then rinse clean with water.

MAINTENANCE CLEANING

Dilute TANDEX WSD with 50 or more parts of water for an economical detergent cleaner for scuff marks on walls and light switches and as a general purpose cleaner for canteen and office floors.

ENGINE DEGREASING

TANDEX WSD when diluted with 3 to 5 parts water can be used as a heavy duty engine and machinery degreaser. The best method of use is to brush the TANDEX WSD solution all over the machinery with a paint brush or similar and then rinse off with clean water.

PAINT OR OIL SPILLS

TANDEX WSD is an excellent emergency product for oil or paint spillages, the product can be used neat or broken down with 3 to 5 parts water, thoroughly agitated through the oil and then mopped up or hosed away. For paint spills it is important to treat the spill before it commences to dry out. Use TANDEX WSD neat and agitate thoroughly throughout the spill before picking up or water rinsing away.

SOLVENT SPILLAGES

TANDEX WSD renders flammable solvent spills safe. The product is used neat at the rate of 1 part to every 5 parts spill and thoroughly agitated through the spill with pressure hoses to ensure that all traces of the solvent are taken up in the TANDEX WSD solution.

TANK CLEANING

TANDEX WSD is very effective for spray cleaning of fuel tanks. Depending upon the type of oil, TANDEX WSD should be used at concentrations from 1% to 5% in water.

HANDLING

PLEASE NOTE: Rinse product contacting surfaces with potable water after use.

Tandex WSD is a relatively safe product to use, but normal handling procedures should be observed to prevent eye contact or excessive skin contact which could cause dryness or sensitizing of the skin.

PACKAGING

Tandex WSD is packed in 15 litre and 205 litre non-returnable drums.